

Panasonic®


Universal Rear-View Camera

English

Model

CY-RC50KU

Operating Instructions

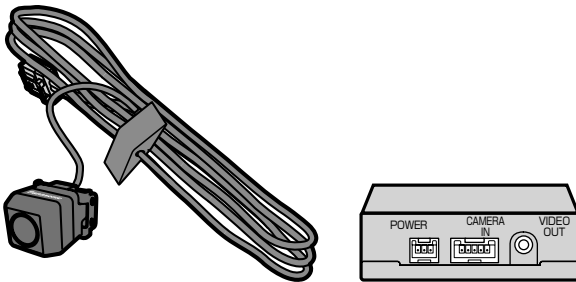

 **Strada**

- Please read these instructions (including “Limited Warranty” and “Customer Services Directory”) carefully before using this product and keep this manual for future reference.

Safety information

- ❑ Read the operating instructions for the unit and all other components of your car navigation system carefully before using the system. They contain instructions about how to use the system in a safe and effective manner. Panasonic assumes no responsibility for any problems resulting from failure to observe the instructions given in this manual.



Warning

This pictograph alerts you to the presence of important operating instructions. Failure to heed the instructions may result in severe injury or death.



Caution

This pictograph alerts you to the presence of important operating instructions. Failure to heed the instructions may result in injury or material damage.

! Warning

Observe the following warnings when using this unit.

- ❑ **Always reverse slowly, checking for safety with your own eyes.**

The camera image is perceived differently from the actual distance. The field of view which can be displayed is also limited. Reverse slowly, checking safety by eye, rather than relying on the screen. Reversing without checking safety can cause collisions with people and objects.

- ❑ **Always use a fuse of the specified capacity. Ask a specialist engineer to replace the fuse.**
If the fuse used exceeds the specified capacity, it can cause fire, smoke, ignition and other breakdowns. Consult your dealer or service center to request fuse replacement or repair.

- ❑ **Do not continue using the system when it has broken down or malfunctioned.**

If there is a breakdown (no image, no sound, etc.) or malfunctions (a foreign object inside, water on the components, smoke comes out, abnormal noise or odor, etc.), immediately stop using it, then consult your dealer or service center. Continued use in that state could cause fire, electric shock or accident.

Caution

Observe the following cautions when using this unit.

Do not use this system for any purpose other than mounting on a road vehicle.

Non-vehicular use (such as use outdoors or on a pleasure boat) could cause smoking generation, ignition, electric shock, injury and breakdown.

Do not use an automatic car-washing machine to wash the vehicle.

Exposure to water from a high pressure hose or impact from a brush may cause the system to fall resulting in accident or injury. Water entering inside the camera can result in a fire, electric shock or breakdown.

Observe the following cautions when installing.

Do not damage cords.

Do not damage, pull, bend, twist or modify cords, place heavy objects on them, or place them near hot equipment or in contact with hot parts of the vehicle. Breaking or shorting cords could cause fire, electric shock, or accidents.

- Route cords so that they cannot be pinched by the body of the vehicle, screws or moving parts (seat rails etc.).
- Do not press cords with the point of a screwdriver or similar implement.

Do not damage the rear view camera cord.

Water and moisture can move along the cord from the damaged area and enter the camera, causing fire, electric shock and breakdown.

Route the rear view camera cord inside the vehicle, so that water cannot penetrate them.

If water enters the vehicle during rain or car washing, it could cause fire or electric shock.

Order wiring, mounting and dismounting work from a specialist engineer.

Wiring, mounting and dismounting work requires specialist skills and experience. For safety, ask your dealer to perform such work. In the case that this system is installed in a vehicle with a drive computer or a navigation system, improper removal of the battery may result in erasure of system's memory.

Only use the accessories provided and the parts specified.

Use of non-specified parts can cause internal damage to the equipment, and insecure mounting could allow it to fall off, causing accident, breakdown and fire.

Mount the equipment securely, so that it cannot come off and fall.

Wipe the mounting area clean of dirt, wax etc., then fasten the camera securely in place. Re-affixing adhesive parts or use of general-purpose double-sided tape could cause weak bonding that would allow the equipment to drop off while the vehicle is in motion, causing accident or injury. Check the state of bonding or mounting (loose screws etc.) occasionally.

Troubleshooting

If you suspect something wrong

Check and take steps as described below.

If the described suggestions do not solve the problem, it is recommended to take the unit to your nearest authorized Panasonic Servicenter. The product should be serviced only by qualified personnel. Please refer checking and repair to professionals.

Panasonic shall not be liable for any accidents arising out of neglect of checking the unit or your own repair after your checking.

Never take measures especially those other than indicated by *italic* letters in “Possible solution” described below because those are too dangerous for users to handle themselves.

Warning

- Do not use the unit in an irregular condition, for example, without sound, or with smoke or a foul smell, which can cause ignition or electric shock. Immediately stop using the unit and consult your dealer.
- Never try to repair the unit by yourself because it is dangerous to do so.

Problem	Possible cause ⇒ Possible solution
No image from the camera.	<ul style="list-style-type: none">• Incorrect settings or connection. ⇒ <i>Check settings and cord connections.</i>• The fuse for the system, or for equipment connected to it, has blown. ⇒ <i>Consult a Panasonic Servicenter.</i>
Image is unclear.	<ul style="list-style-type: none">• Is there dust or dirt on the camera? ⇒ <i>Wipe the lens clean.</i>
White lines (vertical lines of light) on the screen.	<ul style="list-style-type: none">• If the camera is viewing the sun directly, or a strong light (reflection from a fender, a headlight beam etc.) shines into it, bright vertical lines can appear above and below the light source. (Smearing) ⇒ <i>This is not a breakdown.</i>
Noise on the screen.	<ul style="list-style-type: none">• When the area viewed by the camera is lit by fluorescent light or a similar light source, noise can appear on the screen. (Flickering) ⇒ <i>This is not a breakdown.</i>
Screen display is hard to see.	<ul style="list-style-type: none">• The screen display may become hard to see when it shows a dark area, or an image that is bright in a small area, or when the camera is hot. ⇒ <i>This is not a breakdown.</i>

Customer services directory

U.S.A.

Obtain Product Information and Operating Assistance; locate your nearest Dealer or Servicer; purchase Parts and Accessories; or make Customer Service and Literature requests by visiting our Web Site at: <http://www.panasonic.com/support>

or, contact us via the web at: <http://www.panasonic.com/contactinfo>

You may also contact us directly at: 1-800-211-PANA (7262), Monday-Friday 9 am-9 pm; Saturday-Sunday 10 am-7 pm, EST.

For hearing or speech impaired TTY users,
TTY : 1-877-833-8855

Accessory Purchases:

Purchase Parts, Accessories and Instruction Books online for all Panasonic Products by visiting our Web Site at:

<http://www.pasc.panasonic.com>

or, send your request by E-mail to:

npcparts@panasonic.com

You may also contact us directly at: 1-800-332-5368 (Phone) 1-800-237-9080 (Fax Only)

(Monday-Friday 9 am to 8 pm, EST.)

Panasonic Services Company
20421 84th Avenue South, Kent, WA 98032
(We accept Visa, MasterCard, Discover Card, American Express, and Personal Checks)

For hearing or speech impaired TTY users,
TTY : 1-866-605-1277

Service in Puerto Rico

Panasonic Puerto Rico, Inc.
Panasonic Sales Company
Factory Servicer:
Ave. 65 de Infantería, Km. 9.5, San Gabriel
Industrial Park,
Carolina, Puerto Rico 00985
Phone (787) 750-4300, Fax (787) 768-2910

CANADA

WARRANTY SERVICE

FOR PRODUCT OPERATION ASSISTANCE, please contact:

Our Customer Care Centre:

Telephone #: (905) 624-5505

1-800 #: 1-800-561-5505

Fax #: (905) 238-2360

Email link: "Contact Us" on www.panasonic.ca

FOR PRODUCT REPAIRS, please locate your nearest Authorized Servicer at www.panasonic.ca:

Link: "Servicentres™ locator" under "Customer support"

IF YOU SHIP THE PRODUCT TO A SERVICENTRE

Carefully pack and send prepaid, adequately insured and preferably in the original carton. Include details of the defect claimed, and proof of date of original purchase.

Specifications

Output image	Wide-angle mirror image (for checking the rear view)
Video format	NTSC composite
Power supply	DC 12 V, negative ground
Power consumption	1.6 W (approx. 135 mA)
Image sensor	Color CCD, solid-state, 6.35 mm { $\frac{1}{4}$ "}
Effective pixels	Approx. 250 000 pixels
Lens	Wide angle, focal length $f=1.94$ mm, F 1:2.8
Angular field of view	Horizontal: 134°, Vertical: 103°
S/N ratio	46 dB or more (at recommended light level)
Horizontal resolution	330 TV lines (at center)
Brightness range	Approx. 1.5 lx – 100 000 lx
Image output	1 Vp-p (75 Ω)
Dimensions (W x H x D)	
• Rear view camera	23 mm x 21 mm x 20 mm { $\frac{15}{16}$ " x $\frac{7}{8}$ " x $\frac{13}{16}$ "}
	(cord length 4 m, not including projections on the rear)
• Rear view camera control unit	76 mm x 27 mm x 40 mm {3" x 1 $\frac{1}{16}$ " x 1 $\frac{9}{16}$ "}
Weight	
• Rear view camera	Approx. 90 g {3.2 oz.} (including cord)
• Rear view camera control unit	Approx. 110 g {3.9 oz.}

Note:

- Specifications and the design are subject to modification without notice due to improvements in technology.
- Some figures and illustrations on this manual may be different from your product.

Panasonic Consumer Electronics Company, Division of Panasonic Corporation of North America
One Panasonic Way, Secaucus, New Jersey 07094
<http://www.panasonic.com>

Panasonic Sales Company, Division of Panasonic Puerto Rico, Inc. ("PSC")
Ave. 65 de Infanteria, Km. 9.5 San Gabriel Industrial Park, Carolina, Puerto Rico 00985
<http://www.panasonic.com>

Panasonic Canada Inc.
5770 Ambler Drive, Mississauga, Ontario L4W 2T3
<http://www.panasonic.ca>

Warning

Observe the following warnings when installing.

Use on a DC 12 V ⊖ grounded vehicle.

This system can only be used on a DC 12 V ⊖ grounded vehicle. It cannot be used in DC 24 V and other battery system (large trucks, diesel vehicles for use in cold regions, etc.). Use on such vehicles would cause fire and breakdown.

Disconnect the battery ⊖ terminal during performing any wiring or installation work.

Wiring or installation work with the battery ⊖ terminal connected could cause electric shock and injury from shorting.

This system should be installed in a way so that operation of vehicle protective devices such as an air bag is not hindered.

Should this system be installed in a vehicle with a protective device such as an air bag or an anti-theft system, check with the car manufacturer about operational cautions prior to attempting installation and perform the installation in a safe and proper manner. Improper removal of the battery may result in a malfunction of a device or possibly death.

Never use the security parts of the vehicle for mounting or grounding the system.

Use of the bolts or nuts of security parts (steering, brake systems, fuel tank etc.) can cause brake failure, fire, or other accidents.

Check positions of pipes, tanks, electric wirings in the vehicle when mounting.

Never interfere with or touch pipes, tanks, or electric wirings when opening holes in the vehicle body for installation. Apply rust prevention and waterproofing treatments to the processed area, as rust or water leakage may result in a fire, an electric shock, or other accident.

Route cords so that they do not get in the way of occupants driving or getting into or out of the vehicle.

Route cords so that they do not tangle with the steering wheel, shift lever, brake pedals, feet etc., and bundle and fasten them appropriately. Poorly arranged cords can cause accident and injury.

Wire and mount the system as instructed.

Fire or accident could result if wiring and mounting do not properly follow the operating instructions.

Do not attempt to disassemble, repair or modify the system.

Never attempt to disassemble, repair or modify the system, or to remove cord insulation to take power supply from other devices. Fire, electric shock or accident could result.

After mounting and wiring the system, check that all vehicle systems function normally.

If any vehicle equipment (brakes, lights, horn, hazard and indicator lights etc.) does not work normally, fire, electric shock or accident could result.

Keep screws and other small components away from small children.

There is a risk that they could swallow small components. Seek immediate medical attention if that happens.

Notes on use

Carefully read the instruction manuals for the connected devices (Car Monitor etc.).

Before reversing, always check behind you by eye.

- This product uses mirrored display (which mimics the orientation of the rear-view and side mirrors), and is for checking the view behind the vehicle.
- It is intended to augment the driver's field of vision behind the vehicle. It is not able to view all hazards and obstacles.
- It uses a wide-angle lens, which makes close areas appear wider and further areas narrower. This may cause perceived distances to differ from actual distances.

This product can be connected to a monitor etc. with RCA-type video inputs. When the shift lever is in reverse (R), the linkage function (camera interrupt display) and scaled display correspond to the connected display device, so we are unable to guarantee normal operation.

Check the mounting of the system components regularly

- Check that there are no loose screws, and that the camera bracket is not detached.
- Check that the rubber water seals where the cord enters the vehicle are parallel to the rubber gasket where they are in contact.

Do not display a direct view of the sun for long periods

- A burned image could remain on the screen.

Do not use a cellular telephone or wireless equipment close to the system

- Screen noise and malfunctions could result.
You are advised to use cellular telephone or wireless equipment away from this system.

Disclaimers

- Any repairs to breakdowns or damage caused by fire, earthquake, third-party action, other accident, actions of the user, whether by accident or design, incorrect operation or usage under other abnormal conditions will, as a rule, require payment of repair fees.
- Not guaranteed when equipped in a commercial-use vehicle (buses, trucks, taxis, goods vehicles etc.).

Product servicing

If the suggestions in the charts do not solve the problem, we recommend that you take it to your nearest authorized Panasonic Servicenter. The product should be serviced only by a qualified technician.

Replacing the Fuse


Use fuses of the same specified rating (**1 A**). Using different substitutes or fuses with higher rating, or connecting the product directly without a fuse, could cause fire or damage to this unit.

If the replacement of the fuse fails, consult your nearest authorized Panasonic Servicenter for service.

Maintenance

Caution on cleaning

- Do not wipe with volatile chemicals, such as alcohol, benzene, thinners and gasoline. These can cause deformation, deterioration and breakage.
- Do not wipe with cleaners that contain abrasive particles, as they leave scratches.
- If the lens is dirty, wipe it gently with a soft, moist cloth. Wiping strongly with a dry cloth will damage the lens.

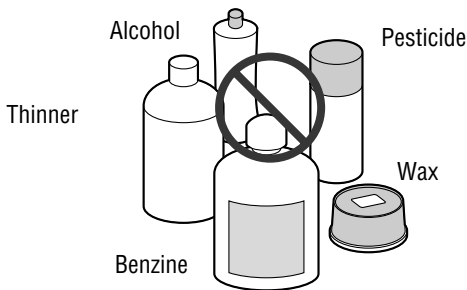

Limited warranty

U.S.A.

PANASONIC CONSUMER ELECTRONICS COMPANY,
DIVISION OF PANASONIC CORPORATION OF NORTH AMERICA
One Panasonic Way, Secaucus, New Jersey 07094

PANASONIC SALES COMPANY,
DIVISION OF PANASONIC PUERTO RICO, INC.
Ave. 65 de Infantería, Km. 9.5, San Gabriel Industrial Park
Carolina, Puerto Rico 00985

PANASONIC AUTO PRODUCTS LIMITED WARRANTY

LIMITED WARRANTY COVERAGE

If your product does not work properly because of defects in materials and workmanship.

Panasonic Consumer Electronics Company or Panasonic Sales Company (collectively referred to as "the warrantor") will, for the length of the period indicated in the chart below, which starts with the date of original purchase ("warranty period"), at its option either (a) repair your product with new or refurbished parts, or (b) replace it with a new or refurbished product. The decision to repair or replace will be made by the warrantor.

Categories	Parts	Labor
Audio Components (except items listed below)	One (1) Year	One (1) Year
MXE Series Audio Components (except items listed below)	Two (2) Years	Two (2) Years
Speakers	One (1) Year	Not Applicable
Defective Car Audio Speakers under warranty must be exchanged at the place of purchase. Contact your Dealer for details.		
Accessories (in exchange for defective items)	Ninety (90) Days	Not Applicable

During the "Labor" warranty period, there will be no charge for labor. During the "Parts" warranty period, there will be no charge for parts. You must carry in or mail in your product prepaid during the warranty period. If nonrechargeable batteries are included, they are not warranted. This warranty only applies to products purchased and serviced in the United States or Puerto Rico. This warranty is extended only to the original purchaser of a new product which was not sold "as is". A purchase receipt or other proof of the original purchase date is required for warranty service.

CARRY-IN OR MAIL-IN SERVICE

For Carry-In or Mail-In Service in the United States, call 1-800-211-PANA (7262) or visit

Panasonic Web Site: <http://www.panasonic.com>

For assistance in Puerto Rico, call Panasonic Sales Company (787)-750-4300 or fax (787)-768-2910.

LIMITED WARRANTY LIMITS AND EXCLUSIONS

This warranty ONLY COVERS failures due to defects in materials and workmanship, and DOES NOT COVER normal wear and tear or cosmetic damage. The warranty ALSO DOES NOT COVER damages which occurred during shipment, failures which are caused by products not supplied by the warrantor, failures which result from accident, misuse, abuse, neglect, bug infestation, mishandling, misapplication, alteration, faulty installation, set-up adjustment, maladjustment of consumer control, improper maintenance, improper antenna, inadequate signal reception or pickup, power line surge, improper voltage supply, lightning, modification, commercial use (such as use in hotels, offices, restaurants, or other business uses) or rental use of the product, or service by anyone other than the technician from Factory Servicenter or other authorized service centers, or damage that is attributable to acts of God.

THERE ARE NO EXPRESS WARRANTIES EXCEPT AS LISTED UNDER "LIMITED WARRANTY COVERAGE". THE WARRANTOR IS NOT LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THIS PRODUCT, OR ARISING OUT OF ANY BREACH OF THIS WARRANTY. (As examples, this excludes damages for lost time, cost of having someone remove

or re-install an installed unit if applicable, travel to and from the seviceur, and loss of media, data or other memory contents. The items listed are not exclusive, but are for illustration only.) **ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTY OF MERCHANTABILITY, ARE LIMITED TO THE PERIOD OF THE LIMITED WARRANTY.**

Some states do not allow the exclusion or limitation of incidental or consequential damages, or limitations on how long an implied warranty lasts, so the exclusions may not apply to you.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state. If a problem with this product develops during or after the warranty period, you may contact your dealer or Servicenter. If the problem is not handled to your satisfaction, then write to warrantor's Consumer Affairs Department at the addresses of the warrantor.

PARTS AND SERVICE WHICH ARE NOT COVERED BY THIS LIMITED WARRANTY ARE YOUR RESPONSIBILITY.

Customer's Record

Model No. _____
Serial No. _____
Dealer's No. _____
Code No. _____
Dealer's Address _____
Date of Purchase _____

CANADA

Panasonic Canada Inc.
5770 Ambler Drive, Mississauga Ontario L4W 2T3

PANASONIC PRODUCT LIMITED WARRANTY

Panasonic Canada Inc. warrants this product to be free from defects in materials and workmanship and agrees to remedy any such defect for a period as stated below from the date of original purchase.

CAR AUDIO PRODUCT – ONE (1) YEAR, PARTS AND LABOUR

(The labour to install or remove the product is not warranted)
ACCESSOIRES - NINETY (90) DAYS, (IN EXCHANGE FOR DEFECTIVE ITEMS)

LIMITATIONS AND EXCLUSIONS

This warranty does not apply to products purchased outside Canada or to any product which has been improperly installed, subjected to usage for which the product was not designed, misused or abused, damaged during shipping, or which has been altered or repaired in any way that affects the reliability or detracts from the performance, nor does it cover any product which is used commercially. Dry cell batteries are also excluded from coverage under this warranty.

This warranty is extended to the original end user purchaser only. A purchase receipt or other proof of the original purchase date is required before warranty service is performed.

THIS EXPRESS, LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

IN NO EVENT WILL PANASONIC CANADA INC. BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES.


In certain instances, some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, or the exclusion of implied warranties, so the above limitations and exclusions may not be applicable.

Check the contents


Consult your dealer if any item is missing.

• Figures in () are quantities.


**Rear view camera
(with Rubber water seal)**



**Rear view camera
control unit**



Camera bracket




Bolts with washer




Hexagon wrench




Power cord



RCA cord




Clip connector




Cord clamp




Cord rail




Tie band



Velcro tape




Double-sided tape




■ Accessories

**Operating instructions
(this manual)**








**Owners information
card**




Cord routing (example)

- Route the camera cord so that it does not allow rainwater etc. to penetrate.
- Allow enough slack in the cord so that it is not pulled when the door is opened and closed.

Hatchback or Van type

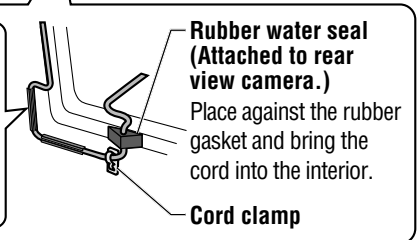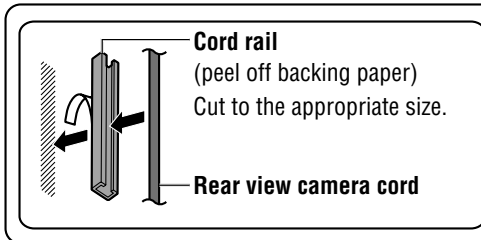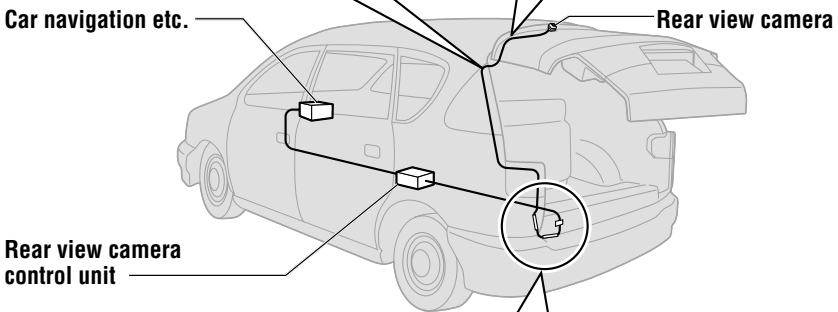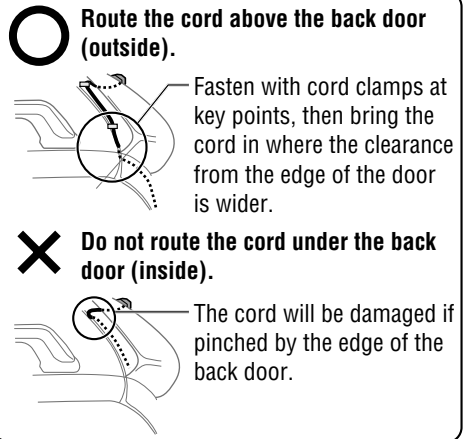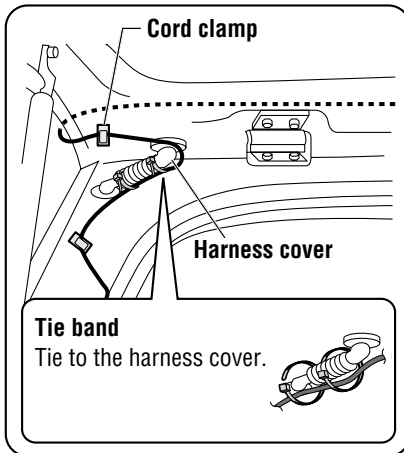

Sedan type

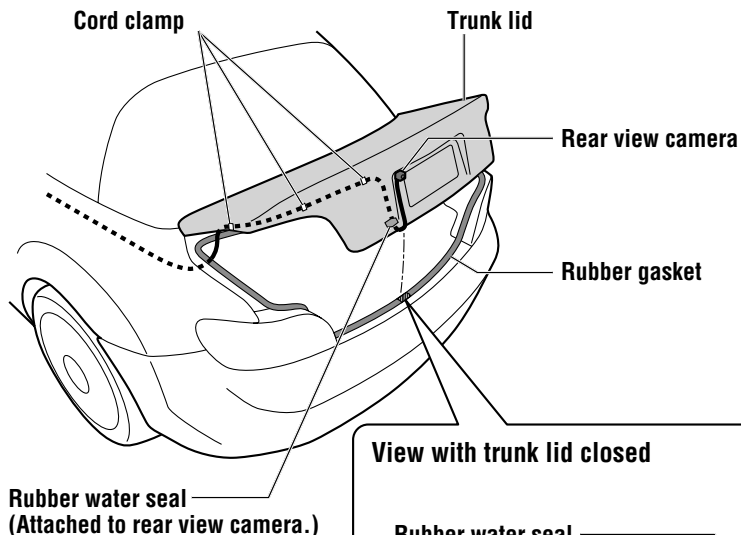

View with trunk lid closed

A cross-sectional diagram showing the trunk lid being closed. Labels with leader lines point to the Rubber water seal (Attached to rear view camera.) and the Rubber gasket. The rubber water seal is shown being pushed into the gap between the trunk lid and the body panel, parallel to the rubber gasket.

Attach the rubber water seal so that it is parallel with the rubber gasket when the trunk is closed.

Note:

- Open and close the back door or trunk lid slowly to check that the camera cord is not pinched or abraded by the door/lid. Moisture or water can enter through the damaged area of the cord and penetrate to the interior of the camera, causing breakdowns.
- Route the camera cord as far as possible from the antenna cord.
(It could cause noise in TV and radio signals.)
- If AM radio broadcasts are affected by noise, move the camera cord further from the vehicle wiring harness.

Mounting procedure

Rear view camera

Before mounting

Wipe away all oil and dirt etc. from the mounting surface.

Make connections and placement tentatively at first, to check positions. Repeated affixing weakens the adhesive.

- The screw holes to use, and the possible angle adjustment, vary according to the mounting position. Adjust the angle and check that the required field of view is visible. (It is not possible to re-affix components.)
- Mount the camera so that it does not contact the vehicle body or rear wipers.

■ For secure mounting

- Do not work outdoors in rainy weather.
- When the air temperature is low, use the vehicle's interior heater or defogger, or a dryer, to warm the bonding area.
- Use a dryer etc. to thoroughly remove all moisture. Dirt and moisture on the bonding surface reduce bond strength and could cause the camera to fall off.
- After mounting the camera, do not expose it to rain or other water, pull it or subject it to strong forces for 24 hours.

Note:

- The camera cannot be affixed to painted or glass surfaces which have been treated with fluoroplastics (treatments which shed water droplets, mud etc.), or to re-painted surfaces.


Rear view camera control unit

Before mounting

Wipe away all oil and dirt etc. from the mounting surface.


Mounting on carpet etc.

Rear view camera control unit

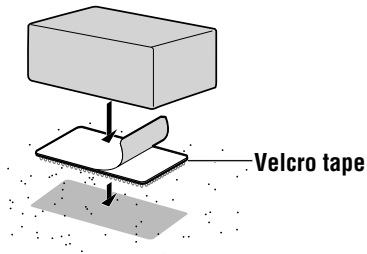

Mounting on hard surfaces (floor etc.)

Rear view camera control unit

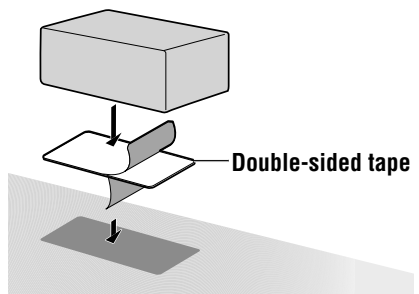

Note:

Do not mount the control unit in the following locations, which could cause breakdowns.


- Places exposed to water
- Places which could be stepped on
- Dusty places
- Close to heater ducts or heat-emitting objects
- Places exposed to direct sunlight
- Under the carpet, or any other position that gets hot

Wiring procedure

Make connections and set and operate acco

When connected to a Panasonic Car Monitor etc., the image from the camera is automatically displayed in the screen when the shift lever is moved to reverse (R).

- For some combinations of vehicle type and device, additional cords (option) may be required, or connection may not be possible.
Consult your dealer or service center.
- For connection with products from other companies, consult the manufacturer of each device.

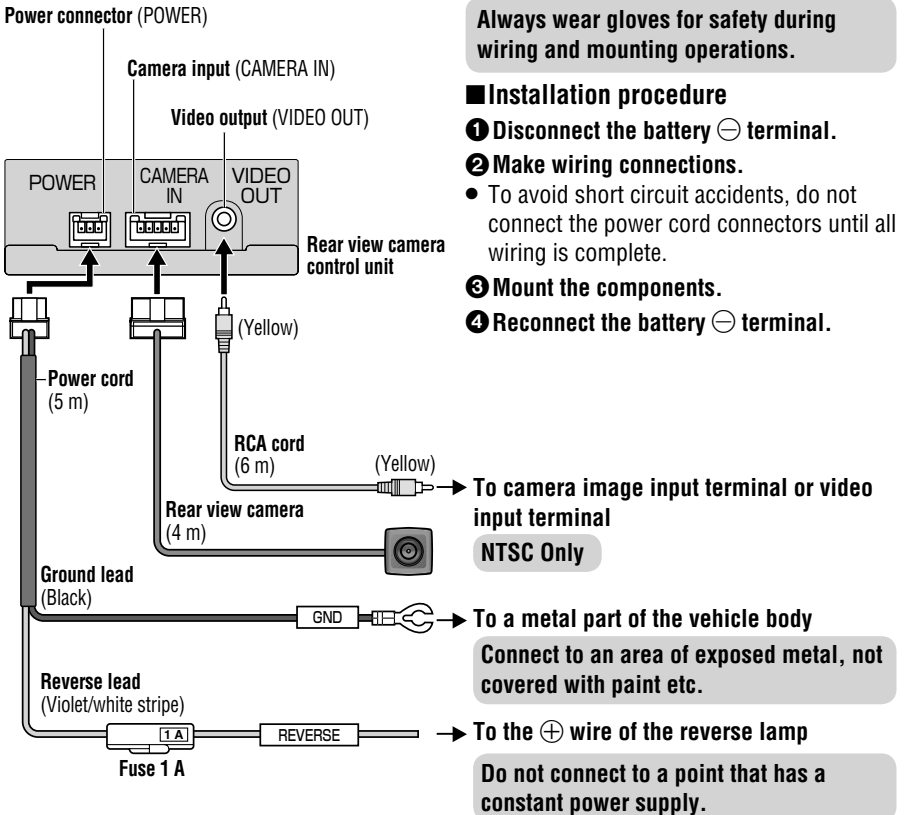


Note:

- Insert connectors securely. Also, take care to avoid pulling on the cords.
- Do not extend the RCA cord or rear view camera cord, as video noise and breakdowns could result.
- Only use clip connectors in the specified places.

ording to the installation instructions for the connected devices.


Connection to a Car Navigation System (example)

Connect to the \oplus wire of the reverse lamp (lamp with a transparent lens, which lights for reversing) which lights when the vehicle shift lever is moved to reverse (R).

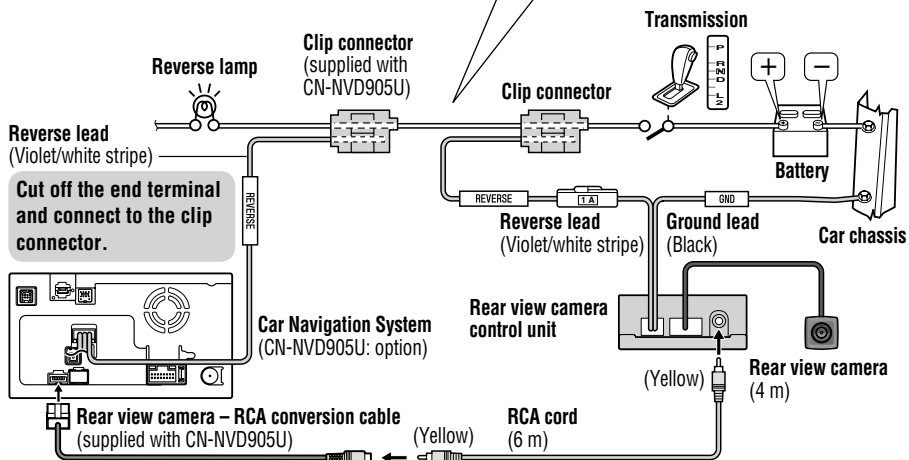


Connection to a Car Monitor (example)

Connect to the \oplus wire of the reverse lamp (lamp with a transparent lens, which lights for reversing) which lights when the vehicle shift lever is moved to reverse (R).

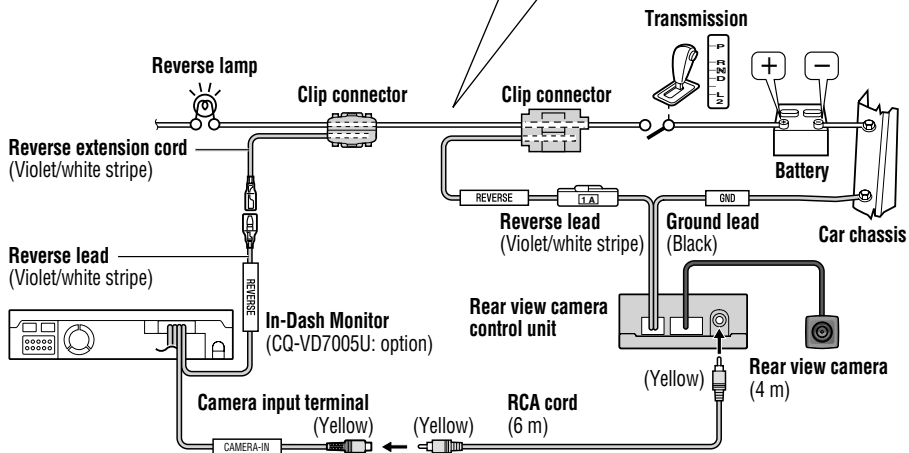

Connection to a Car Monitor from another company (example)

Connect to the \oplus wire of the reverse lamp (lamp with a transparent lens, which lights for reversing) which lights when the vehicle shift lever is moved to reverse (R).

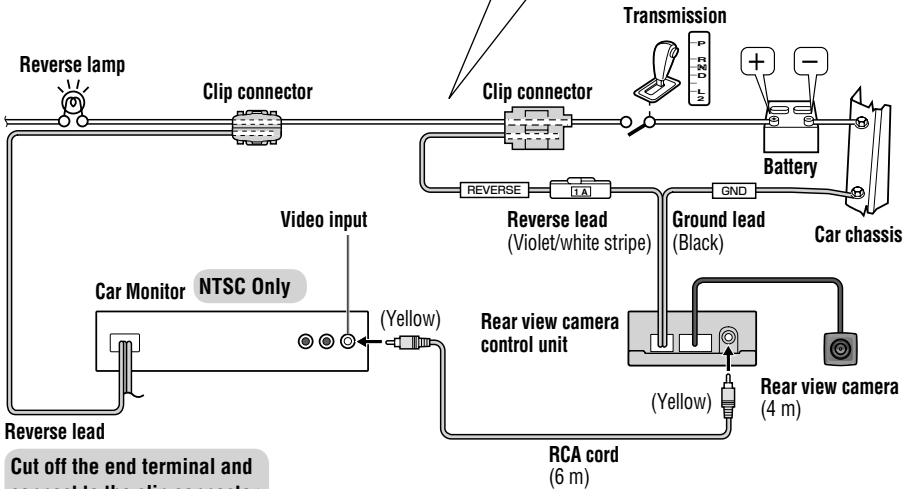


Cut off the end terminal and connect to the clip connector.


How to disconnect locked cords

- Pulling strongly will break the cord.
- Check that the lock is released before disconnecting.

Power cord



Rear view camera cord




How to attach a clip connector


- 1 Insert the cord into the clip connector.

Vehicle-side wiring cord


Reverse lead of this unit



- 2 Press the element into place.



- 3 Close the cover.




1 Attach the camera bracket to a glass or painted surface on the vehicle body.

① Form the camera bracket to fit the form of the mounting surface. (Do not remove the backing paper)




② Peel the backing paper and press the camera bracket firmly onto the surface.



- Do not touch the bonding surface with your hands.
- Do not re-attach the adhesive.

2 Mount the camera body onto the camera bracket.

Bolt with washer




Hexagon wrench

Rear view camera
Side with logo
uppermost

Side view

The screw holes to use, and the possible angle adjustment, vary according to the mounting position.

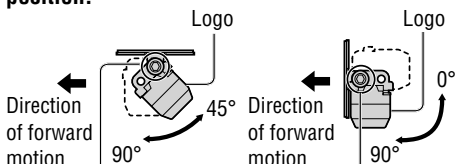


Mount on the screw holes on the side opposite the direction of forward motion.

Mount on the screw holes below the camera.

3 Adjust the camera angle so that the fender or the rear edge of the vehicle appears at the bottom of the monitor.

Use the Hexagon wrench to loosen the bolts, then adjust the camera angle. (After adjusting, tighten the bolts securely.)



Fender or the rear edge of the vehicle

Camera field of view

